



TOOLS OF THE TRADE




Up to
30%
off
list price!

Pricing valid **January 6 - 31, 2026**,
while quantities last.


Dual Contact Holders

Improve rigidity and reduce vibration allowing for increased feed rates and increased tool life. Use GS Tooling dual contact holders in machining setups where higher rigidity, precision, and stability are critical. They work to their full potential when paired with dual contact spindles.



CAT40 & CAT50 Dual Contact ER Collet Chucks

- DIN coolant option - standard
- All ground body
- TIR, 0.0003" at 4X Dia.
- AT2 Taper Accuracy
- RFID chip hole
- Balanced G2.5 at 30,000rpm, certificate included




Collet Series	Collet Range	L	L1	D	Tightening Torque (Nm)	Code No.	List Price \$	SALE \$
CAT40								
ER11**	0.019-0.275	4.00	0.65	0.75	29.8	521632	243.17	170.22
ER11**	0.019-0.275	6.00	0.65	0.75	29.8	521634	261.74	183.22
ER16**	0.019-0.406	2.50	0.87	1.26	56.9	521406	236.10	165.27
ER16**	0.019-0.406	4.00	0.87	1.26	56.9	521405	202.49	141.74
ER16**	0.019-0.406	6.00	0.87	1.26	56.9	521410	261.74	183.22
ER32	0.078-0.787	2.50	1.34	1.97	169.5	521656	253.78	177.65
ER32	0.078-0.787	3.13	1.34	1.97	169.5	521424	253.78	177.65
ER32	0.078-0.787	6.00	1.34	1.97	169.5	521425	250.25	175.18
ER40	0.118-1.023	2.50	1.50	2.48	219.6	521666	246.70	172.69
CAT50								
ER32	0.078-0.787	4.00	1.34	1.97	169.5	521454	324.52	227.16
ER32	0.078-0.787	6.00	1.34	1.97	169.5	521456	393.50	275.45

* Hex Nut

CAT40 & CAT50 Dual Contact End Mill Holders

- DIN coolant option - standard
- All ground body
- TIR, 0.0001" / 0.003mm OD to ID
- AT2 Taper Accuracy
- RFID chip hole
- Balanced G6.3 at 30,000rpm, certificate included



Hole Dia. (d)	Gauge Length (L)	L1	D	Set Screw	Code No.	List Price \$	SALE \$
CAT40							
1/2	4.00	2.56	1.38	7/16-20	521028	145.02	101.51
1/2	5.00	2.56	1.38	7/16-20	521030	181.27	126.89
5/8	3.00	3.50	1.65	9/16-18	521034	158.28	110.80
5/8	4.00	3.50	1.65	9/16-18	521036	178.62	125.03
5/8	5.50	3.50	1.65	9/16-18	521038	194.54	136.18
3/4	3.00	3.86	1.75	5/8-18	521042	162.70	113.89
3/4	4.00	3.86	1.75	5/8-18	521044	187.11	130.98
3/4	5.50	3.86	1.75	5/8-18	521046	296.94	207.86
1	2.00	2.36	2.36	3/4-16	521054	179.51	125.66
1	4.00	4.21	2.36	3/4-16	521056	179.51	125.66
1-1/4	2.00*	2.36	2.25	3/4-16	521060†	183.04	128.13
1-1/4	6.00	3.54	2.48	3/4-16	521064	309.49	216.64
1-1/2	4.50	2.95	2.99	3/4-16	521066	198.96	139.27
CAT50							
1/2	6.00	1.77	1.38	7/16-20	521122	253.78	177.65
5/8	4.00	1.77	1.65	9/16-18	521130	284.73	199.31
5/8	6.00	1.77	1.65	9/16-18	521132	309.49	216.64
3/4	4.00	3.86	1.89	5/8-18	521140	252.02	176.41
3/4	6.00	3.86	1.89	5/8-18	521142	256.44	179.51
1	4.00	4.21	2.36	3/4-16	521154	256.44	179.51
1	6.00	4.21	2.36	3/4-16	521156	261.74	183.22
1	8.00	4.21	2.36	3/4-16	521158	300.65	210.46
1-1/4	4.00	3.54	2.48	3/4-16	521162	274.12	191.88
1-1/4	8.00	3.54	2.48	3/4-16	521166	313.91	219.74
1-1/2	4.50	3.15	2.99	3/4-16	521170	274.12	191.88
2	5.37	4.13	3.74	1-14	521178	296.22	207.35

* Stubby Length † Not DIN Coolant



Sowa Tool & Machine Co. Ltd.

Order online at www.SowaTool.com, email sales@sowatool.com or call 1-800-265-8221.

We reserve the right to make pricing changes or impose purchase restrictions at any time, and accept no liabilities for mistakes and printing errors. Shipping charges apply & will be noted on invoice. All taxes extra.




Up to
30%
off
list price!

TOOLS OF THE TRADE 
Pricing Valid **January 6 - 31, 2026**
While quantities last. Backorders not eligible for promotional pricing.

CAT Dual Contact Shell Mill Holders

- DIN coolant option - standard
- All ground body, nose, pilot, flange
- TIR, 0.0001" / 0.003mm OD to ID
- AT2 Taper Accuracy
- Certified Steel
- RFID chip hole

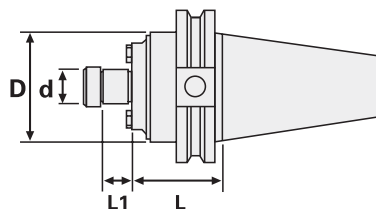


d	L	D	L1	Key Size	Arbor Thread	Code No.	List Price \$	SALE \$
CAT40								
3/4	1.75	1.75	0.67	5/16	3/8-24	521192	177.74	124.42
3/4	6.00	1.75	0.67	5/16	3/8-24	521195	331.50	232.05
1	1.75	2.38	0.67	3/8	1/2-20	521196	181.27	126.89
1	6.00	2.38	0.67	3/8	1/2-20	521199	336.59	235.61
1-1/4	4.00	2.88	0.67	1/2	5/8-18	521202	345.75	242.03
1-1/2	2.00	3.80	0.93	5/8	3/4-16	521204	212.22	148.55

d	L	D	L1	Key Size	Arbor Thread	Code No.	List Price \$	SALE \$
CAT50								
3/4	1.75	2.00	0.67	5/16	3/8-24	521208	235.21	164.65
1	1.75	2.75	0.69	3/8	1/2-20	521216	215.76	151.03
1	4.00	2.75	0.69	3/8	1/2-20	521218	318.33	222.83
1-1/4	6.00	2.88	0.69	1/2	5/8-18	521228	397.92	278.54
1-1/2	6.00	3.80	0.93	5/8	3/4-16	521236	397.92	278.54
2	4.00	4.38	0.93	3/4	1-14	521242	568.58	398.01

Don't forget your Retention Knobs!

Ground Pilot with Flat O-Ring on Pilot to prevent coolant penetration into the spindle.



Taper	Model	Coolant Through	D	d	L	F	Angle	Thread	Code No.	List Price \$	SALE \$
BT30	GS585X45	N	0.433	0.276	0.709	0.197	45	M12x1.75	366000	23.78	17.84
	GS585X60	N	0.433	0.276	0.709	0.197	60	M12x1.75	366002	25.19	18.89
	GSC444X15	Y	0.748	0.551	0.905	0.275	15	M16x2	366004	33.60	25.20
	GS444X45	N	0.590	0.390	1.102	0.236	45	M16x2	366006	23.78	17.84
BT40	GS444X60	N	0.590	0.390	1.102	0.236	60	M16x2	366008	28.97	21.73
	PSC478	Y	0.740	0.490	0.440	0.120	45	M16x2	366020	26.54	19.91
	GSC477	Y	0.740	0.490	0.552	0.236	45	M16x2	366024	36.12	27.09
	PSC278	Y	1.140	0.820	0.700	0.200	45	M24x3	366082	34.80	26.10
BT50	GS446X45	N	0.906	0.669	1.378	0.394	45	M24x3	366084	49.35	37.01
	GSC446X45	Y	0.906	0.669	1.378	0.394	45	M24x3	366090	51.45	38.59
	GSC470X15	Y	0.748	0.551	0.787	0.157	15	5/8x11	366034	19.82	14.87
	GS474	N	0.740	0.490	0.440	0.118	45	5/8x11	366036	19.82	14.87
CAT40	GS475	N	0.740	0.490	0.440	0.120	45	5/8x11	366042	19.82	14.87
	GS532X15	N	0.748	0.551	0.792	0.275	15	5/8x11	366048	21.00	15.75
	GS532X60	N	0.590	0.390	0.990	0.236	60	5/8x11	366052	24.15	18.11
	GS532X90	N	0.590	0.390	0.990	0.236	90	5/8x11	366054	21.00	15.75
	GSC532X60	Y	0.590	0.390	0.990	0.236	60	5/8x11	366060	21.00	15.75
	GSC532X90	Y	0.590	0.390	0.990	0.236	90	5/8x11	366062	21.00	15.75
	PSC552	Y	0.594	0.406	1.139	0.187	45	5/8x11	366066	34.80	26.10
	GS572X45	N	0.590	0.390	0.990	0.120	45	5/8x11	366068	19.82	14.87
	GS275	N	1.140	0.820	0.700	0.200	45	1x8	366092	26.25	19.69
	PSC274	Y	1.140	0.820	0.700	0.200	45	1x8	366094	36.40	27.30
	GSC275	Y	1.140	0.820	0.700	0.200	45	1x8	366096	24.78	18.59
	GS536X45	N	0.906	0.669	1.386	0.394	45	1x8	366098	25.27	18.95
CAT50	GS536X60	N	0.906	0.669	1.386	0.394	60	1x8	366100	24.78	18.59
	GSC536X60	Y	0.906	0.669	1.386	0.394	60	1x8	366106	24.78	18.59
	GSC536X90	Y	0.906	0.669	1.386	0.394	90	1x8	366108	28.50	21.38



Sowa Tool & Machine Co. Ltd.

Order online at www.SowaTool.com, email sales@sowatool.com or call 1-800-265-8221.

We reserve the right to make pricing changes or impose purchase restrictions at any time, and accept no liabilities for mistakes and printing errors. Shipping charges apply & will be noted on invoice. All taxes extra.